




RE-02

Dual System Pickup Instruction Manual

Function Introduction



1. Knob: Master Volume

2. Knob:+Button: (1) Knob: Adjustment of the tone of the pick-up.

(2) Button: Press the potentiometer [4] to turn on the tuning mode.

3. Knob: Adjust the contact mic pickup volume

4. Tuning display:



A. Displays the corresponding chord code;

B. Red and green indicator light;

C. Red and green indicator light;

D. indicator for Tuning mode

Pattern 1. When the 6.35 output line is not inserted

to [8]: Press [2] to activate the tuning mode, D always lights red, B lights red when the tone is high, C lights red when the tone is low, B and C light green at the same time when in tune.

Pattern 2: Insert the 6.35 output line to [8]: Press [2] once to activate the tuning mode, D always lights red (Speaker non silent mode), B lights red when the tone is high. C lights red when the tone is low, B and C light green at the same time when in tune; Press [2] again D flashes (silent mode of Speaker) B lights red when the tone is high, C lights red when the tone is low, B and C light green at the same time when in tune.

Caution: When the product is low power, B and C flash red at the same time. Please replace the 9V battery at [9]

5. The socket connecting the preamp and battery box

6. Contact mic pickup socket

7. Piezo pickup connection

8. 6.35 Audio output socket

9. Battery compartment for 9V batteries




Contact Mic Pickup




Undersaddle Piezo Pickup


Installations

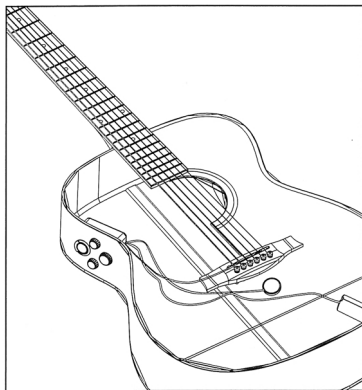

Hole-cutting Drawings for Installation



Hole-cutting Drawing of Preamp



Hole-cutting Drawing of Battery box

RE-02